PCC02 (ExpressCard 34/54 to PCIe / USB Adapter)


PCC02 is PCI Express interface to ExpressCard Adapter, which accepts both 34mm and 54 mm express card and allows express card's Hot- Plug and hot swap without power off the system. So, by installing this card into an open PCI-Express slot it will allow the user to go back and forth from your laptop to your PC without any problems.

System Requirements

- One PCI Express (PCIe) expansion slot (X1, X4, X8, or X16) on motherboard. [Please make sure that the motherboard of your desktop computer is equipped with a PCI Express (PCIe) expansion slot, not the regular PCI expansion slot !]
- One USB 2.0 port. [Internal USB port is preferred]




- PCI Express Interface Card with an ExpressCard 34/54 Socket
- USB A to B cable (USB2.0 A Type to B Type cable 50cm)

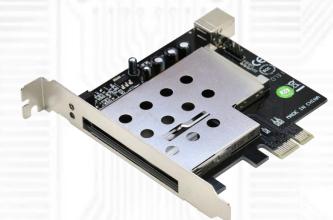

Features

- Easy Installation, Plug and Play; Enable hot-plug and hot-swap
- No drivers needed for this PCIe-to ExpressCard Adapter
- Support both of ExpressCard/54 or ExpressCard/34cards.
- Push-Push mechanism for easy insertion of Express Card
- Support Windows 2000/Server 2003/XP & XP 64-bit/Vista & Vista 64-bit/ 7 & 7 64-bit
- Supports both PCI Express based ExpressCard and USB 2.0 based ExpressCard
- Supports PCI Express 2.5Gb/s data rate
- Supports USB 2.0 480 Mb/s data rate
- Mini USB 2.0 connector to USB Host connection
- No external power required

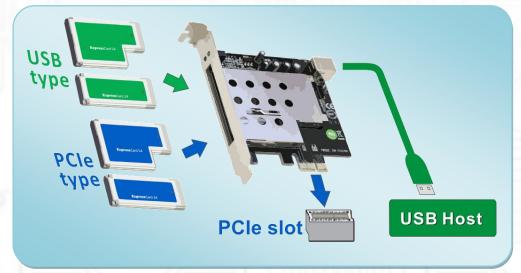

Specifications

- Interface board dimension: 90 mm x 69 mm x 12 mm
- Operating temperature: 0°C to 60°C
- Storage temperature: -20°C to 80°C
- Relative humidity: 0% to 90% non-condensing
- · Weight: 35g

