

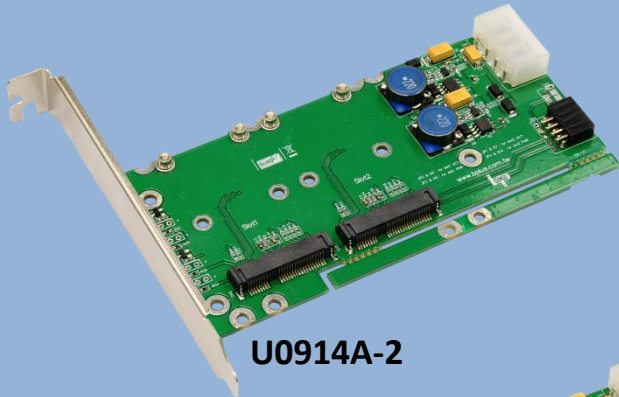


# U0914A

(3G/4G Wireless MODEM to USB 9P Header)

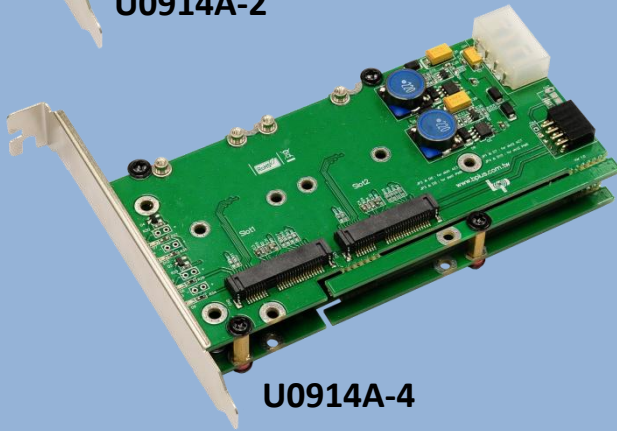

**U0914A-2**

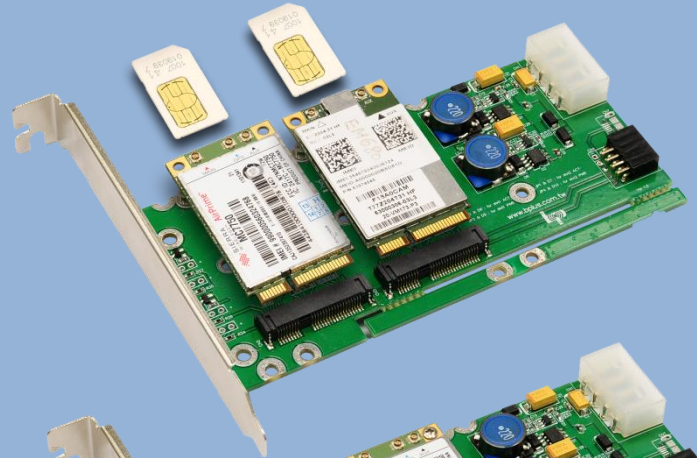


**U0914A-4**




The U0914A adapter is designed for desktop/Embedded system that converts 3G/4G wireless Mini-Card to USB 9pin Header port.

You can insert your USB type minicard such as GSM, HSPA(3.5G), GPS, 3G, LTE cards to this adapter then plug to USB port. As standard SIM card is provided, you can connect to network carrier with SIM card.

**U0914A-2**

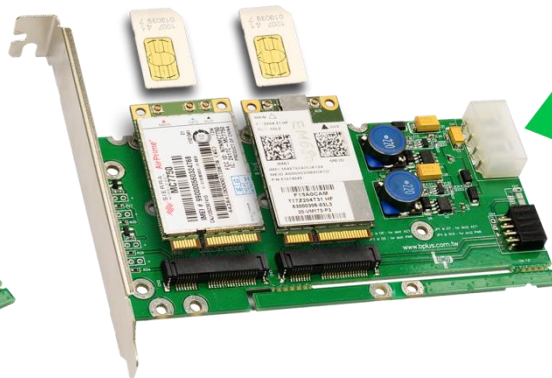

**Power input**

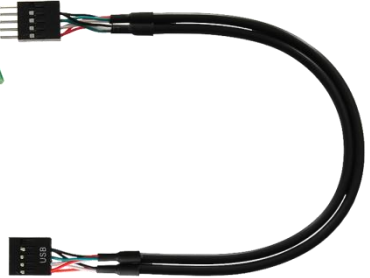

**USB**

## Specification

- USB 9pin connection to desktop or Embedded system
- Supports USB interface of Mini-Cards such as 2G GSM, GPRS, 3G, CDMA, WLAN, WWLAN, HSPA MODEM, GPS, 4G WiMAX, LTE, and Mini-Card to desktop PC
- Support SIM card connector.
- Support U.FL/IPX to SMA pigtail RF cable adapter
- (Option) 824-984MHz; 1850-1990MHz SMA Antenna
- (Option) 800-960MHz; 1710-2170MHz SMA Antenna
- (Option) 700-960MHz; 1710-2700MHz SMA Antenna
- (Option) 694-960MHz; 1710-2170MHz SMA Antenna
- (Option) SMA or RP-SMA to U.FI/IPX RF Cable
- (Option) 3G CDMA / 4G LTE MiniCard

## Function

### System Requirements

USB 2.0 9pin port

MiniCard: Full / Half -dimension


Certification

RoHS

### Operating Temperature



0 ~ 70°C

## U0914A-2 Package Contents

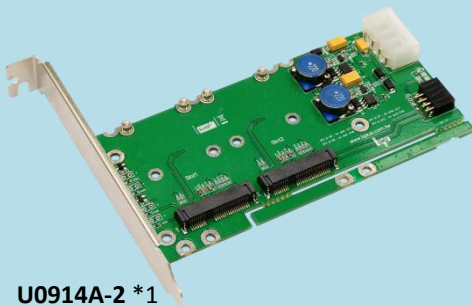

**U0914A-2 \*1**  
(Dual 3G/4G Wireless MODEM to USB 9P Header)

**Y09-U12-030 \*1**  
(USB2.0 9PIN cable 30cm)

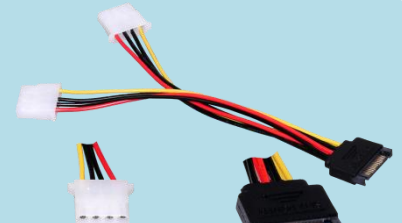


**Y15-P03-015 \*1**  
(SATA Power Connector Female to 2 x 5.25" Power Cable)





**Screw \*4**

## U0914A-4 Package Contents

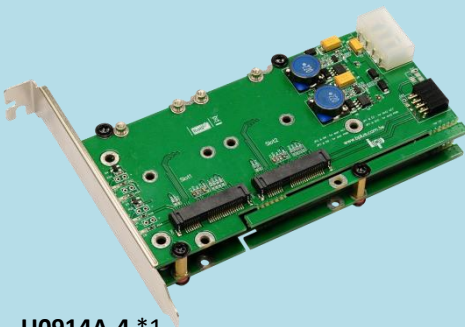

**U0914A-4 \*1**  
(Quad 3G/4G Wireless MODEM to USB 9P Header)

**Y09-U12-030 \*2**  
(USB2.0 9PIN cable 30cm)

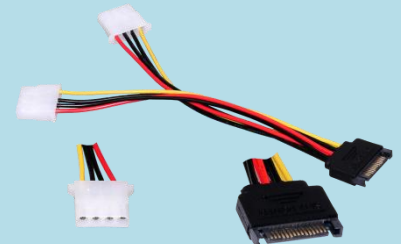

**Y15-P03-015 \*1**  
(SATA Power Connector Female to 2 x 5.25" Power Cable)



**Screw \*8**